

CHARACTERISTICS


Hose made of transparent plasticized PVC. High flexibility and permeability. Difficult breakage during elongation. High resistance to atmospheric agents. Non-toxic and food-grade.

APPLICATIONS

Ideal hose for transporting liquids where visual control, leveling in construction and general irrigation are required. Suitable for passing through food liquids.

TEMPERATURES

From -10°C to +60°C

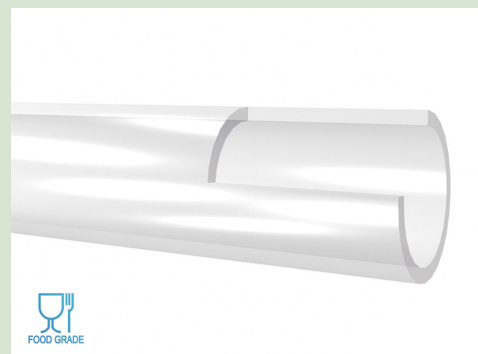

ø Interior mm	ø Outside mm	Weight g/m	radius of curvature mm	Roll m	Code
2+/-0.3	4+/-0.3	12	8	50	AH026010204
3+/-0.3	5+/-0.3	16	10	50	AH026010305
4+/-0.3	6+/-0.3	20	12	50	AH026010406
5+/-0.3	7+/-0.3	24	15	50	AH026010507
5+/-0.3	8+/-0.3	39	16	50	AH026010508
6+/-0.3	8+/-0.3	28	16	50	AH026010608
6+/-0.3	9+/-0.3	45	18	50	AH026010609
6+/-0.3	10+/-0.3	62	20	50	AH026010610
6+/-0.3	12+/-0.3	104	25	50	AH026010612
7+/-0.3	10+/-0.3	49	20	50	AH026010710
8+/-0.3	10+/-0.3	35	20	50	AH026010810
8+/-0.3	11+/-0.3	55	25	50	AH026010811
8+/-0.3	12+/-0.3	78	25	50	AH026010812
8+/-0.3	14+/-0.3	128	30	50	AH026010814
9+/-0.3	12+/-0.3	61	25	50	AH026010912
9+/-0.3	13+/-0.3	85	30	50	AH026010913
9+/-0.3	15+/-0.3	140	35	50	AH026010915
10+/-0.3	12+/-0.3	43	25	50	AH026011012
10+/-0.3	13+/-0.3	67	30	50	AH026011013
10+/-0.3	14+/-0.3	93	35	50	AH026011014
12+/-0.3	15+/-0.3	78	35	50	AH026011215
12+/-0.3	16+/-0.3	108	35	50	AH026011216
12+/-0.3	18+/-0.3	174	35	50	AH026011218
13+/-0.3	19+/-0.3	186	40	50	AH026011319
14+/-0.3	18+/-0.3	124	40	50	AH026011418
15+/-0.3	20+/-0.3	169	45	50	AH026011520
18+/-0.3	23+/-0.3	198	50	50	AH026011823
20+/-0.3	25+/-0.3	218	50	50	AH026012025
25+/-0.3	31+/-0.3	325	60	50	AH026012531
30+/-0.3	38+/-0.3	526	75	50	AH026013038
35+/-0.3	43+/-0.3	603	85	50	AH026013543
40+/-0.3	49+/-0.3	775	100	25	AH026014049
50+/-0.3	60+/-0.3	1065	120	25	AH026015060