


PVC SUCTION

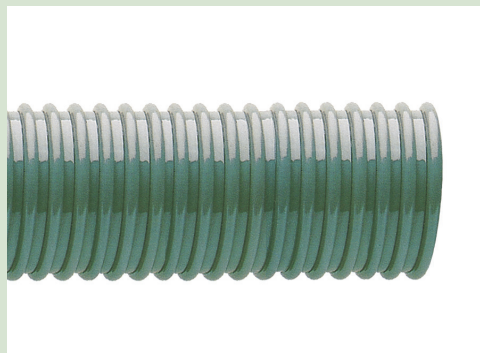

CHARACTERISTICS

Non-toxic grey hose made of flexible PVC and reinforced with a rigid, non-deformable, shock-resistant PVC spiral. Smooth interior surface and corrugated exterior. Great flexibility and lightness. Resistant to impacts, atmospheric agents, smoke and various chemicals.

APPLICATIONS

Hose ideal for suction and expulsion of gases, fumes, dust, shavings, seeds and fibers. Agricultural machinery.

TEMPERATURES

From -15°C to +65°C

ø Interior mm	Wall thickness mm	Weight g/m	Vacuum _{mH₂O}	radius of curvature mm	Roll m	Code
10	2.1	70	5	15	50	AE221010
15	2.1	100	5	15	50	AE221015
19	2.1	115	5	19	50	AE221019
20	2.5	120	5	20	50	AE221020
25	2.6	170	5	25	50	AE221025
26	2.6	200	5	26	50	AE221026
30	2.8	210	5	30	50	AE221030
32	3.0	218	5	32	50	AE221032
34	3.0	235	5	34	50	AE221034
35	3.1	240	5	35	50	AE221035
38	3.1	260	5	38	50	AE221038
40	3.2	280	4	40	50	AE221040
45	3.5	410	4	45	50	AE221045
50	3.5	450	4	50	50	AE221050
55	3.5	490	4	55	50	AE221055
60	4.0	540	4	60	50	AE221060
65	4.0	590	4	65	50	AE221065
70	4.2	640	4	70	50	AE221070
75	4.5	690	4	75	50	AE221075
80	4.5	780	4	80	50	AE221080
90	4.5	830	4	90	30	AE221090
102	5.0	980	4	100	30	AE221102
110	5.2	1150	4	110	30	AE221110
120	5.5	1200	4	120	30	AE221120
125	5.5	1250	4	125	30	AE221125
130	5.5	1300	4	130	30	AE221130
140	5.5	1500	4	140	30	AE221140
150	6.0	1700	4	150	30	AE221150
160	6.0	1825	4	160	30	AE221160
180	6.5	2200	4	180	30	AE221180
200	7.0	2400	4	200	20	AE221200
250	7.0	3000	4	250	10	AE221250
300	8.0	3600	4	300	10	AE221300