


# PETROL-SPL15 APL

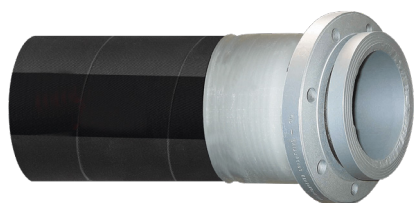

## CHARACTERISTICS

Hose made of black NBR rubber with high tenacity textile reinforcement, steel spiral and braid for electrostatic discharge. Resistant to oils, abrasion, ozone and weathering. Robust structure for tough and demanding services according to EN 1765:2005 S15. Fitted with ANSI B16 150 RF flanges and pressed according to EN 14421:2004.

## APPLICATIONS

Hose ideal for transferring cargo from ships and tank barges to port. Suction and pumping of petroleum products with aromatic content of up to 50% and unleaded gasoline with max. 5% MTBE and 15% oxygenated products.

## TEMPERATURES

From -20°C to +80°C

| ø Interior mm | Weight kg/m | Working pressure (bar) | Bursting pressure (bar) | Radius of curvature mm | Code     |
|---------------|-------------|------------------------|-------------------------|------------------------|----------|
| 51            | 2.60        | 15                     | 64                      | 260                    | AP927051 |
| 76            | 3.90        | 15                     | 64                      | 380                    | AP927076 |
| 102           | 5.60        | 15                     | 64                      | 500                    | AP927102 |
| 127           | 8.30        | 15                     | 60                      | 625                    | AP927127 |
| 152           | 11.20       | 15                     | 60                      | 750                    | AP927152 |