

BLUE PRESSURE WASHER EN-857 2SC

CHARACTERISTICS


Hose with inner cover of black synthetic rubber resistant to high temperatures and outer cover of blue synthetic rubber resistant to oil, abrasion and weathering. It is also reinforced with two metal meshes.

APPLICATIONS

Hose ideal for use in high-pressure hot water washing equipment.

TEMPERATURES

From -40°C to +135°C, up to +155°C in discontinuous use.

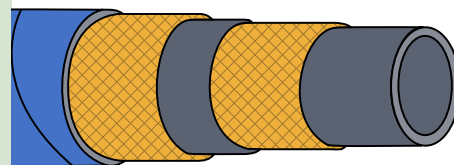

High-pressure hydraulic hoses

ø Interior inches	ø Interior mm	ø Outside mm	Working pressure	Bursting pressure	radius of curvature mm	Code
1/4"	6.4	14.2	400	1600	75	AK0240604
5/16"	7.9	16	350	1400	85	AK0240805
3/8"	9.5	18.3	330	1320	90	AK0241006
1/2"	12.7	21.5	275	1100	130	AK0241008

SAE 100 R9R EN-856 4SP

CHARACTERISTICS


Hose with inner cover of black synthetic rubber resistant to hydraulic oil and outer cover of black synthetic rubber resistant to oil, abrasion and weathering. It is also reinforced with four metal meshes.

APPLICATIONS

Hose ideal for use in very high pressure lines. Suitable for petroleum-based fluids, water, and for oils and lubricants.

TEMPERATURES

From -40°C to +100°C, up to +125°C in discontinuous use.

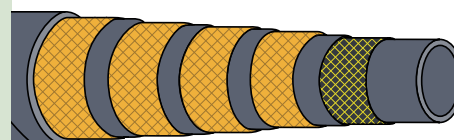

ø Interior inches	ø Interior mm	ø Outside mm	Working pressure	Bursting pressure	radius of curvature mm	Code
3/8"	9.5	21.4	445	1780	180	RCVMAN0906
1/2"	12.7	24.6	415	1660	230	RCVMAN0908
5/8"	15.9	28.5	350	1400	250	RCVMAN0910
3/4"	19	31.5	350	1400	300	RCVMAN0912
1"	25.4	39.7	280	1120	340	RCVMAN0916