


STAINLESS STEEL HOSE

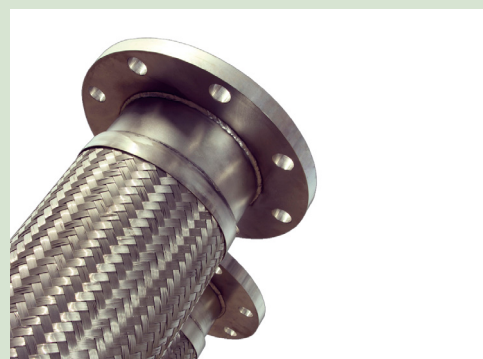

CHARACTERISTICS

Custom manufacturing of stainless steel hoses with AISI 306L interior and single braided AISI 304L with outer mesh and inner corrugation, all made of stainless steel with a high degree of flexibility, with ends welded by TIG welding (male threads, female threads, flanges, etc.).

APPLICATIONS

Hose suitable for compressor equipment in tanker trucks. Complies with UNE-EN ISO 10380 standard.

ø Interior"	ø Interior mm	ø Outside mm	Weight g/m	Working pressure (bar)	Bursting pressure (bar)
1/4"	6.2	9.6	0.15	120	480
3/8"	9.5	12.7	0.21	90	360
1/2"	12.2	16.7	0.24	80	320
5/8"	16.2	21.6	0.40	70	280
3/4"	20.2	26.8	0.49	64	256
1"	25.4	32.2	0.63	50	200
1 1/4"	34.3	41.1	0.85	40	160
1 1/2"	40.1	49.5	1.17	35	140
2"	50.3	60.3	1.61	30	120
2 1/2"	65.6	81	1.98	24	96
3"	80.3	95	2.15	18	72
4"	100.8	117	3.00	16	64
5"	125.4	150	4.88	14	56
6"	150.8	175	5.70	10	40
8"	197	225	9.15	8	23
10"	250.4	278	13.75	7.5	30
12"	300.2	336	18.20	6	24

SANITARY HOSE



CHARACTERISTICS

Black EPDM rubber tube with stainless steel braiding.

APPLICATIONS

Hose ideal for manufacturing connections for toilets, water pumps, meter banks, etc.

TEMPERATURES

-40 to +90°C

ø Interior mm	ø Outside mm	Working pressure	Bursting pressure	radius of curvature mm	Code
8	13	25	100	40	RCVSA0813
13	20	20	80	50	RCVSA1320
19	28	15	60	80	RCVSA1928
25	35	10	40	130	RCVSA2535