STEAM-232

CHARACTERISTICS


Red EPDM rubber hose manufactured on a mandrel with interleaved high tenacity textile reinforcement and spiral steel threads. Exterior in red EPDM rubber resistant to abrasion, aging and weathering.

APPLICATIONS

Hose suitable for pumping saturated steam up to +210ºC and superheated steam up to +232ºC. Complies with BS 5342-2A standard.

TEMPERATURES

From -40ºC to +232ºC

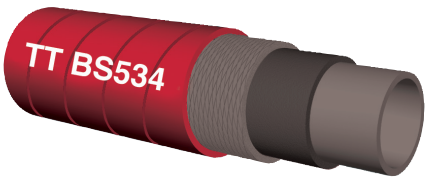

ø Interior mm	ø Outside mm	Weight kg/m	Working pressure (bar)	Bursting pressure (bar)	Roll m	Code
13	25	0.55	18	> 180	40	AP970013025
16	28	0.65	18	> 180	40	AP970016028
19	31	0.66	18	> 180	61	AP970019032
25	37	0.86	18	> 180	61	AP970025039
32	46	1.30	18	> 180	61	AP970032046
38	52	1.60	18	> 180	61	AP970038052
51	66	2.30	18	> 180	40	AP970050068
63	81	3.30	18	> 180	40	AP970063081
76	96	4.05	18	> 180	40	AP970076096
102	124	6.75	18	> 180	20	AP970102124

TECNIMAN