

## WASHING-15

### CHARACTERISTICS


Continuously manufactured EPDM rubber hose with blue outer surface, white inner surface and high tenacity interleaved textile reinforcement.

### APPLICATIONS

Hose ideal for cleaning operations with hot water and moderate chemicals in general industrial processes. Complies with FDA regulations.

### TEMPERATURES

From -30°C to +120°C

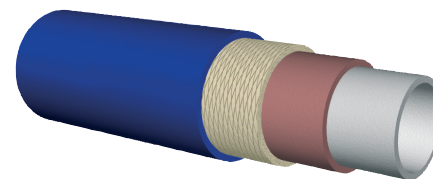

FOOD GRADE

Hoses for food use

| ø Interior mm | ø Outside mm | Working pressure (bar) | Roll m | Code       |
|---------------|--------------|------------------------|--------|------------|
| 13            | 21           | 15                     | 100    | AP13000013 |
| 16            | 25           | 15                     | 100    | AP13000016 |
| 19            | 29           | 15                     | 100    | AP13000019 |
| 25            | 35           | 15                     | 50     | AP13000025 |

## TECNICLEAN

### CHARACTERISTICS


Blue PVC hose manufactured continuously, with high tenacity textile reinforcement. Completely smooth internal and external surfaces to facilitate the passage of substances and to make cleaning and disinfection easier after use.

### APPLICATIONS

Hose designed for the passage of hot water and sanitization at high pressure and high temperature (50 bar at 70°C) in the food industry. Suitable for transport of food liquids according to EU standard 10/2011 (Class A; B, C) Free of Phthalates. Possibility of serving fittings according to customer specifications.

### TEMPERATURES

From -10°C to +70°C

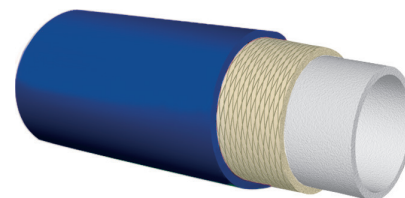

FOOD GRADE

| ø Interior mm | ø Outside mm | Weight g/m | Pressure bar job | radius of curvature mm | Roll m | Code       |
|---------------|--------------|------------|------------------|------------------------|--------|------------|
| 12            | 22           | 365        | 80               | 120                    | 100    | AAG0480017 |